

EO2[®]-30

Chemical oxygen generator providing 3000 litres of breathable oxygen



The EO2-30 is a single use, self-contained oxygen generator that produces 3000 litres (minimum) of breathable pure oxygen over a 25 to 45 minute period. It is the responsibility of the facilities operators to ensure that the units are suitable for the intended application and that written procedures and proper training is available to the users. A Product Handbook that provides guidance of appropriate use is available to all facility operators.


Safety

- Store in a clean, dry environment away from flammable materials and sources of heat
- Do not allow contamination by organic materials such as oil or grease. Contaminated generators **MUST NOT BE USED**, as hydrocarbons with oxygen can explode
- Avoid contact with the generator once started. The generators run with a high surface temperature once initiated and will burn skin on contact or ignite flammable materials
- The generators should **ONLY** be used by trained personnel under controlled conditions. Incorrect use can lead to pressurisation of sealed space and the production of high oxygen content environments




Initiation

1. Refer to the local operating procedure for operating locations(s) and number of units to initiate
2. Confirm the external packaging is in good condition. **DO NOT USE** if contaminated or damaged
3. Confirm the unit is within its shelf life. **DO NOT USE** out of date units
4. Remove the outer protective wrapper (antipollution wrap) – use the metal handle to lift the unit from its anti-pollution wrap
5. Check the generator body for contamination or damage. No dents or contamination with any foreign material is acceptable. If damaged or contaminated **DO NOT USE**
6. Confirm the integrity of the top seal. **DO NOT USE** if the seal is damaged

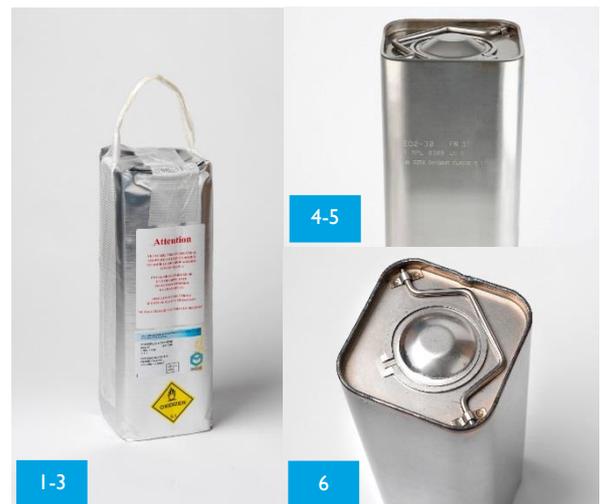

7. Remove cap by lifting the outer ring pull tab and pulling 180 degrees across the top. The tab will break the seal by levering up the edge. The cap can then be pulled off
8. Place oxygen generator in the designated holder or location – see local operating procedure
9. Remove the brass initiator from its protective packaging taking care to avoid contact or damage to the red initiator end
10. Carefully insert the threaded initiator one turn into the top of the generator body ensuring the thread is engaged. Remove and repeat if the thread is not properly engaged. The unit will start as the initiator is screwed into the unit body

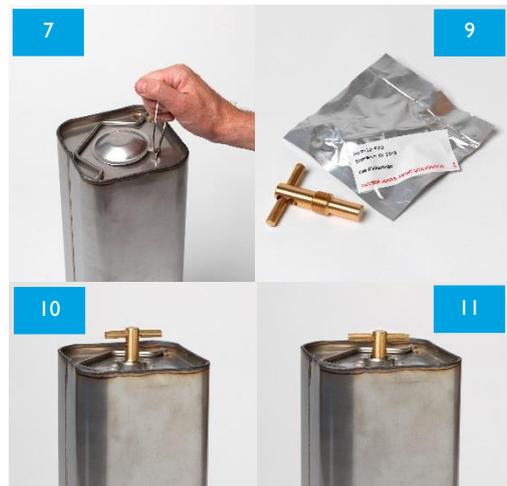

11. Screw the initiator fully into the top of the generator until it will go no further. The generator will start producing oxygen during this operation, although this may not be immediately apparent
12. A slight hiss may be heard and the brass initiator will start to warm up and get hot during the first few minutes of operation. This indicates that the unit is functioning correctly. Beware that the unit will get progressively hotter during the first few minutes of operation and will burn vulnerable materials
13. After approximately 45 minutes the oxygen flow will stop, but the unit will remain very hot for some considerable time. **AVOID CONTACT WITH HOT UNITS**

If a unit fails to start – this is, does not start to heat the top after the first 5 minutes of operation – then carefully remove the initiator and quarantine the unit. The initiator **MUST** be unscrewed and removed before the unit is moved or transported to ensure it cannot subsequently initiate. Any unit damaged or contaminated must also be quarantined and **MUST NOT BE REUSED**.

Disposal

Spent oxygen generators are classed as non-hazardous and can be disposed of to landfill by a specialist waste contractor. Contact Molecular Products regarding the disposal of damaged or used devices, as these are still classified as Oxidisers 5.1 hazardous material. After use the block consists of essentially sodium chloride and iron oxide. The contents of the generator do not come into contact with the user(s) in normal use.

Conditions of use and limit of liability

The EO2-30 self-contained oxygen generator is intended as a single-use source of breathable oxygen. The unit is designed to be used by trained personnel following a procedure set out and accessed by the facility operator. It is the responsibility of the facility operator to ensure the generators are used in a safe manner and can provide the required level of oxygen under the intended conditions of use.

Transport

The generator block is supplied and transported as a UN1479 oxidiser block. It does not form an oxygen generator until the other components necessary for its use are present. The igniter matches are supplied separately and are not despatched using the same transport as the oxidiser block.

Oxidiser block:

Proper shipping name: UN 1479 Oxidising solid N.O.S (contains sodium chlorate). Transport classification: Oxidiser. Hazard classification 5.1. Packing Group: II

Igniter match:

Contains 0.1g phosphorous amorphous (UN1338) per initiator. Exempt from regulation as per IATA 2.6.10 'De Minimis'.

Molecular Products Ltd

Parkway, Harlow Business Park
Harlow, Essex, CM19 5FR, UK

T +44 (0)1279 445111
F +44 (0)1279 401231

E sales@molprod.com
W www.molecularproducts.com